


HOLD

BroLux

CZ: LED pouliční lampa/ SK: LED pouličné lampy/ EN: LED street lamp

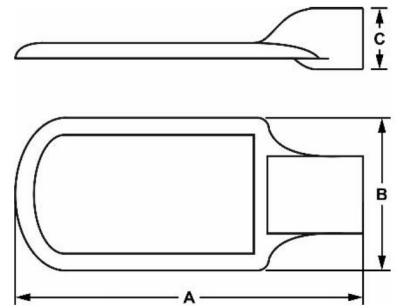

INDEX	ABC				Tc[K]			A [mm]	B [mm]	C [mm]	
045566	Hold LED	30 W	3 000 lm	100lm/W	4000 K	45		266	129	37	5902808809364
045568	Hold LED	50 W	5 000 lm	100lm/W	4000 K	45	Czarny Černá Čierna Black	306	150	37	5902808809371
045567	Hold LED	70 W	7 000 lm	100lm/W	4000 K	45		306	150	37	5902808809388
045569	Hold LED	100 W	10 000 lm	100lm/W	4000 K	60		437	200	40	5902808809395

AC 230V	SMD LED	110°	IP 65
70	40000 h	0,95	IN&OUT

Materiał / Materiál / Material

PL: aluminium

CZ: hliník

SK: hliník

EN: aluminum

Optymalne warunki eksploatacji:

Optimální provozní podmínky:

Optimálne prevádzkové podmienky:

Optimal operating conditions:

PL: temperatura.: od -10°C do +40°C

wilgotność: <85% ciśnienie: 690-1060 hPa

CZ: teplota: od -10 ° C do + 40° C

vlhkost: <85% tlak: 690-1060 hPa

SK: teplota: od -10 ° C do + 40° C

vlhkost: <85% tlak: 690-1060 hPa

EN: temperature: from -10 ° C to + 40° C

humidity: <85% pressure: 690-1060 hPa

BroLux